



DATE	REV	DESCRIPTION	BY	CHKD

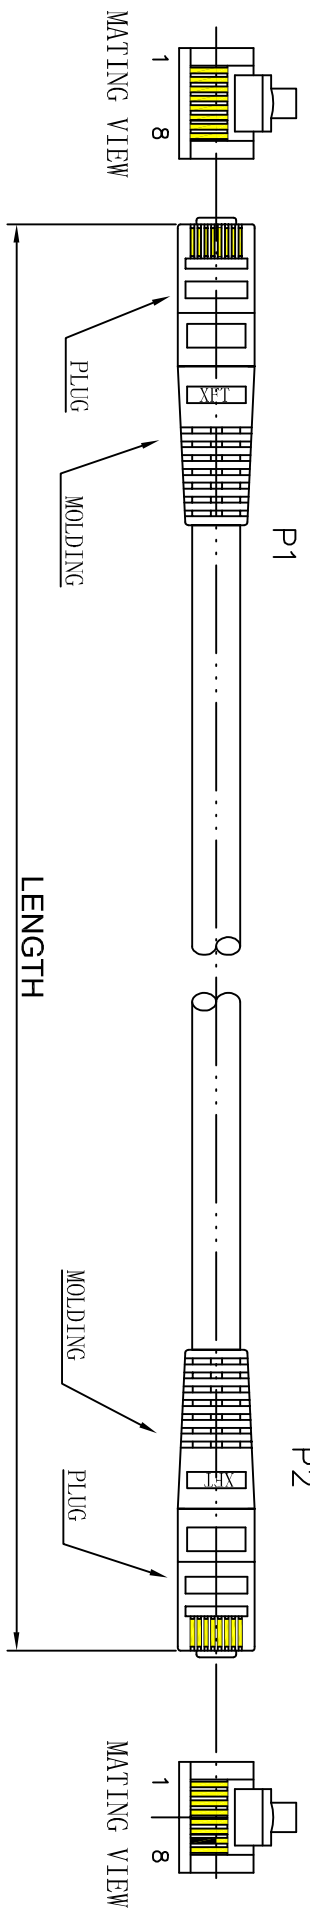


Marking: YFC CAT. 6 26AWG×4P SSTP IEC 60332.1 PATCH CABLE-CONFORM
 TO ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1 3P/ETL VERIFIED
 CM(UL) C(UL) CMH E164469-F3

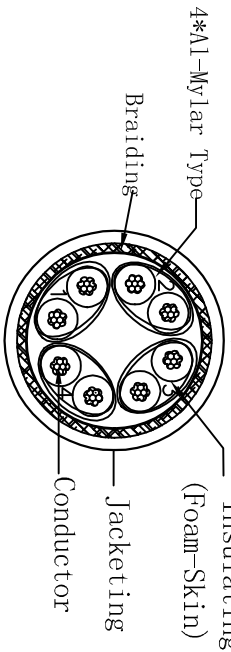

Conductor	Base Copper 26A WG 7/0.16±0.015mm
Insulation	Thickness:MIN at any point:0.2mm MAX AV G:0.5mm Diameter: LOS±0.05mm
Jacketing	Thickness:MIN at any point:0.46mm MAX AV G:0.58mm Diameter:±1±0.2mm

WIRE	CAT.6 SSTP STR 26AWG
PLUG	YUS-04
Length	××M
WIRE COLOR	×

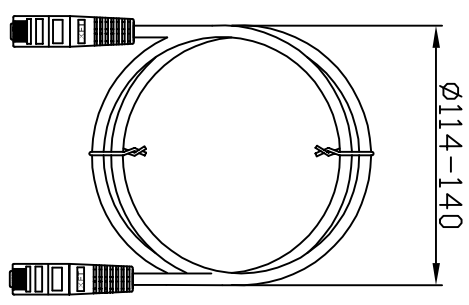

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Unless specified on the drawing, tolerances are per the follows:
 .X ± 1
 .XX ± 0.2
 .XX ± 0.05

PINOUT

PA/R	P1 (T568A)	WIRE	P2 (T568B)
1	3	WHT/ORG	1
2	6	ORG	2
3	1	WHT/GRN	3
4	2	GRN	6
5	4	BLU	4
6	5	WHT/BLU	5
7	7	WHT/BRN	7
8	8	BRN	8



3RD	
-----	--

DRAW .NO	YUS-04	ITEM	CAT.6 SSTP STR 26AWG
DEPARTMENT		DRAW	DATE 2006/08/29
SCALE		CHECKER	APPROVAL
UNIT	MM	SHEET	1 OF 1