

CAT.5e FTP Patch Cord



FEATURES:


All CAT.5e Requirements as Per ANSI/TIA/EIA, ISO/IEC, and CENELEC EN Standards:

1. ANSI/TIA/EIA 568-B.2
2. ISO/IEC 11801 CLASS D+, 2nd Edition
3. CENELEC EN 50173-1
4. CENELEC EN 50288
5. Flame Retardancy is Verified According to IEC 60332-1-2.

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2002/95/EC

CHARACTERISTICS:

Connector	RJ45 Shielded Connector with 50µ Inch Gold Plate	
Housing	PVC Molded with Strain Relief	Option : Snag Proof
Cable	Upon Customers' Request	

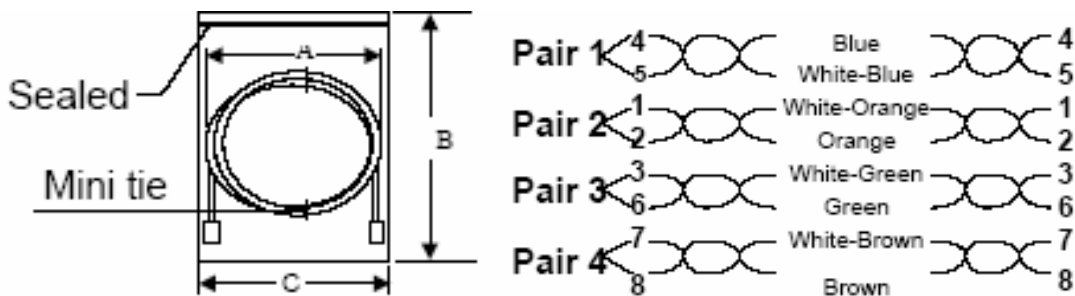

Packing	Length	0.5<X≤3m	4m≤ X <20m
	(A) mm	180+/-5	180+/-10
	Cable width		
	(B×C) mm	280×203	305×240
	PE bag size		

*Other winding diameters and mini tie positions are available upon customers' request.

APPROVALS:

- 3P Certified ANSI/TIA/EIA-568-B.2 Category 5e Testing Performance Requirements.
- UL/cUL Listed

CAT.5e FTP Patch Cord



APPLICATIONS:

- 1000BASE-T Gigabit Ethernet
- 10BASE-T, 100BASE-Tx Fast Ethernet (IEEE 802.3)
- 100 VG - AnyLAN(IEEE802.12), 155/622 Mbps ATM
- 550 MHz Broadband Video
- Voice, T1, ISDN

TYPICAL PERFORMANCE:

NEXT	MHz	1	4	8	10	16	20	25	31.25	62.5	100
	dB	60.0	53.5	48.6	47.0	43.6	42.0	40.3	38.7	33.6	30.1

Impedance: $100\Omega \pm 15\%$

DRAWING:



*Molded and snag proof types are both available.

ORDERING INFORMATION:

Description CAT.5e FTP Patch Cord

YLCP: YFC Patch Cord

E: Cat.5e

F: FTP

X₁: Jacket: A=PVC, C=LSOH

XXX₂: Length:

005=0.5m, 010=1.0m, 020=2.0m, 030=3.0m, 050=5.0m, 070=7.0m

M: Unit: Meter

B: Wiring Scheme: T568B-T568B

XX₃: Color: BL=Blue, RD=Red, YL=Yellow, BK: Black, GN: Green, IV: Ivory