



DATE	REV	DESCRIPTION	BY	CHKD

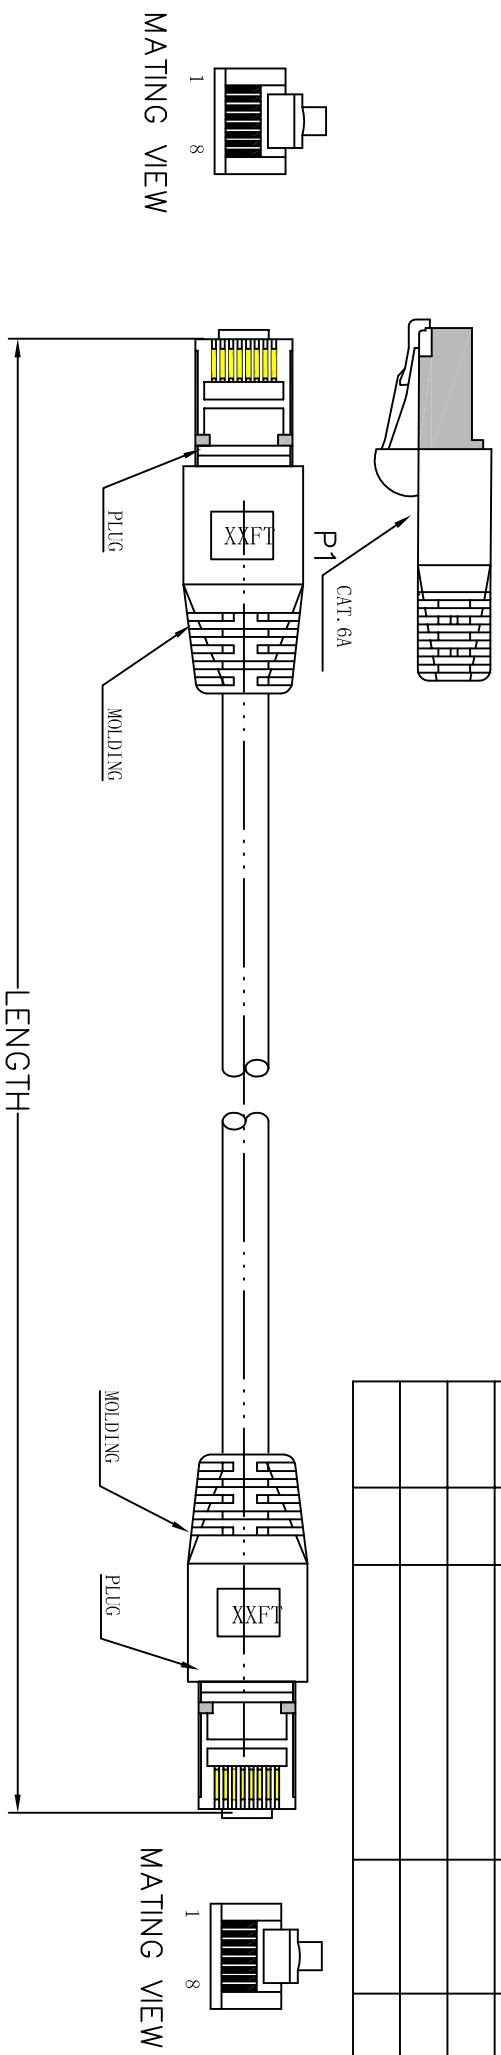

Marking **<LP631> YFC CAT.6A SFTP 10 GIGABIT ETHERNET PATCH CABLE ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 & IEC 332.1 26AWGX4P TYPE CM (UL) CMH E164469-F3**

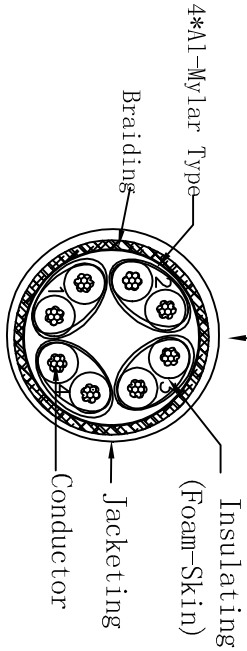


Conductor	26AWG 7/0.152±0.005mm Bare Copper
Insulation	Thickness:MIN at any point0.2mm MAX A/VG0.35mm Diameter:1.05±0.06mm
Jacketing	Thickness:MIN at any point0.46mm MAX A/VG0.58mm Diameter:6.1±0.2mm PVC

Wire	CAT. 6A P1WF STR 26AWG *4P
Plug	YS-02
Length	XX
Wire Color	XX

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PA/R	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	4	GRN	4
	5	BLU	5
3	6	WHT/BLU	6
	7	WHT/BRN	7
4	8	BRN	8
	BRAID		

Unless specified on the drawing, tolerances are per the follows:
 .X ± 1
 .X ± 0.2
 .XX ± 0.05



FIREFOLD
WWW.FIREFOLD.COM

DRAW. NO	YS-02	ITEM	
DEPARTMENT		DRAW	ZHD
SCALE		CHECKER	APPROVAL
UNIT	MM	SHEET	1 OF 1

