


RG59 SIAMESE 20AWG CCA 95% BRAID (2) 18AWG CONDUCTOR 1000' WOOD SPOOL

PART NUMBER:
RG59-18AWG-1K-BLK



PG. 1	<input type="checkbox"/> APPROVALS:	<input type="checkbox"/> DATE:	<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO VERTICAL CABLE AND MAY NOT BE DISCLOSED OR TRANSMITTED TO ANY OTHER PARTIES WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTICAL CABLE. THIS INFORMATION IS PROVIDED FOR THE PURPOSES OF QUOTATION ONLY.</p>
	MARKETING		
	TECHNICAL		 WWW.FIREFOLD.COM
	SALES		
	FINAL		

GENERAL INFORMATION ABOUT THIS PRODUCT:

DESCRIPTION:

RG59 Siamese, (1) 20AWG Bare Copper Coaxial Cable with 95% CCA Braid and (2) 18AWG Stranded Power Cables, Siamese PVC Jacket, 1000', Wooden Spool, Black

ACCESSORIES INCLUDED WITH THIS PRODUCT:

NONE


FEATURES AND BENEFITS:

- Coaxial cable distribution of audio/video, radio frequency CATV-MATV, Computer/Data Processing and CCTV Transmissions.
- RG59 Type Coaxial Cable with One Pair of 18AWG Power Cable
- Siamese Type Configuration with Separation Web
- 20AWG Bare Copper Conductor For Optimal Signal Transmission
- 95% CCA Braid Coverage For Optimum Signal Protection
- Unshielded 18 AWG Stranded Twisted Pair Power Cables
- Indoor Cable Application (non-conduit per NEC) for: CCTV
- Available in a Wooden Spool



WOOD SPOOL

CABLE

PG. 2		<input type="checkbox"/> PRODUCT: RG59 SIAMESE 20 AWG CCA WITH 2 18AWG CONDUCTORS
	<input type="checkbox"/> AUTHOR:	
	<input type="checkbox"/> DATE: 04/03/07 <input type="checkbox"/> REV: 01	

TECHNICAL INFORMATION ABOUT THIS PRODUCT:

DESCRIPTION:

RG59 Siamese, (1) 20AWG Bare Copper Coaxial Cable with 95% CCA Braid and (2) 18AWG Stranded Power Cables, Siamese PVC Jacket, 1000', Wooden Spool, Black

TECHNICAL SPECS:


Physical Characteristics:


	Coax	W/18/2
Inter Conductor		
Size	20 AWG	18 AWG
Material	Bare Copper (Solid)	Bare Copper
Construction	Φ0.81±0.12mm	0.4±0.02mm x7
Insulation		
Material	Foamed PE	PVC
Diameter	Φ3.66±0.1mm	1.9±0.1mm
Min. Thickness	1.18mm	-----
Color	White	Red/Black
First Shield Outer Conductor		
Material	-----	-----
Second Shield Outer Conductor		
Size	0.12mm	-----
Material	CCA	-----
Construction	0.12x9x16 (95%)	-----
Jacket		
Material	PVC	PVC
Diameter	6.1±0.15mm	5.3±0.15mm
Min. Thickness	0.69mm	0.50mm
Color	Black	
Electrical Specifications (20°C)		
Center Conductor DC Resistance	≤33.9Ω/km	≤21.8Ω/km
Nominal Capacitance	52±2pF/m	-----
Impedance	75±3 Ohms	-----

Marking

(UL) / AWM STYLE 1354 (VID:S2) XXXFT

SEQUENTIAL FOOT MARKERS ON JACKET

PG. 3	<input type="checkbox"/>		<input type="checkbox"/> PRODUCT: RG59 SIAMESE 20 AWG CCA WITH 2 18AWG CONDUCTORS
	<input type="checkbox"/> AUTHOR:		 WWW.FIREFOLD.COM
	<input type="checkbox"/> DATE: 04/03/07	<input type="checkbox"/> REV: 01	

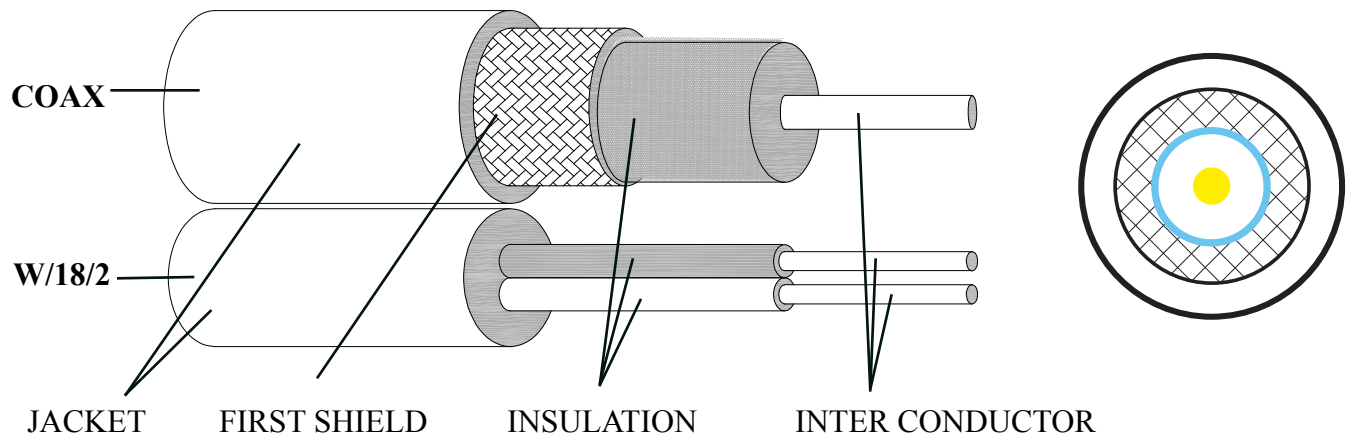

LABEL FOR PRODUCTION DATE CONTROL:

THIS FAMILY OF COAXIAL BULK CABLE WILL NOT INCLUDE SERIAL NUMBER.

THIS UPC LABEL IS PLACED ON EACH 1 UNIT SHIPMENT CARTON.


LABEL: UPC CODE BELOW



IMPORTANT NOTE: --

UL FILE NUMBER: E312655

ETL FILE NUMBER: --

PG. 4	<input type="checkbox"/>	<input type="checkbox"/> PRODUCT: RG59 SIAMESE 20 AWG CCA WITH 2 18AWG CONDUCTORS
	<input type="checkbox"/> AUTHOR:	
	<input type="checkbox"/> DATE: 04/03/07	<input type="checkbox"/> REV: 01
		 FIREFOLD WWW.FIREFOLD.COM